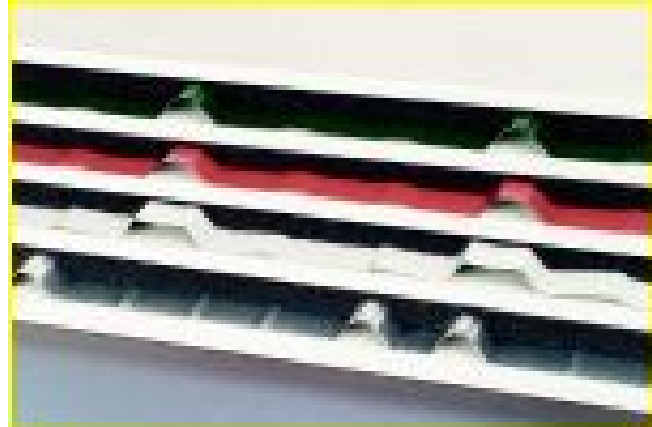


METAL ROOFING RIDGEVENT**UNI-VENT****UNI-VENT****DESCRIPTION:**

UNI-VENT will conform to virtually any roof panel configuration with 1” or less tall profile. It compresses and fills every void between your ridge cap and the roof panel. Factory applied glue strips allow the installer to roll out UNI-VENT and apply the roof panel, even in windy conditions. Then, any standard ridge cap can finish off the installation

- **Stock one product to match many roof panel configurations.**
- **Designed for any pitch from 2/12 to 20/12**
- **Pure polyurethane foam with vinyl coating, UV stabilized and fire retardant.**
- **Tested to 110 MPH wind driven rain**
- **40 year limited warrantee**
- **Does not scratch painted metal surfaces**
- **Dust free material with convenient packaging and easy installation**
- **Dual glue strip for easy installation**
- **Roll size 1” tall x 3” wide x 50’ long**

SPECIFICATIONS:**INDEPENDENT TESTING****PROPERTY****TEST****RESULTS**

PROPERTY	TEST	RESULTS
100 MPH WIND DRIVEN RAIN	CRL 6875	NO LEAKAGE
NET FREE AREA	1” NOM THICKNESS	8.5 SQ IN PER FT PER SIDE/ 17 SQ IN/RIDGE
AIR PERMEABILITY	ASTM D737	840 CU. FT. / MIN
COLD CRACK	F87260 SEC. 4-C-14	RESISTANCE TO -55 DEG C
TEAR STRENGTH	ASTM D35747	3.5 P.P.I.
TENSILE STRENGTH	ASTM D3574	16 P.S.I. – ELONG 175%
ATTIC DUST	ASTM D1739-98	NO CLOGGING
DUST EXPOSURE	ICBO AC132	NO CLOGGING
COMPRESSIVE STRENGTH	ASTM D3574	1.8 P.S.I. @ 75%
UV STABLE	CHAMBER TEST	NO CHANGE TO COLOR OR MATERIALS
ABRASION	ASTM D1175	NO DAMAGE

DIRECT METALS INC:

PHONE : 239-573-9888

FAX :239-573-8600

INSTALLATION:

ASK SALES PERSON FOR INSTALLATION INSTRUCTION SHEET.

INSTOCK SIZES:

**1" x 3" x 50' ROLLS PACKAGED 2 ROLLS/PACKAGE (100 LNFT/PKG)
2 PACKAGES PER BOX AND 7 BOXES PER PALLET.**