


KWIKSEAL II WOODBINDER SCREWS

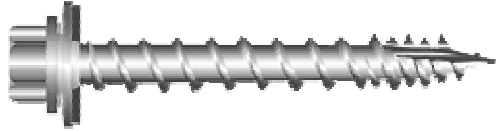

DESCRIPTION:

Designed for metal roofing attachment. Quick penetration due to type -17 cut point and dual stage thread. Rust protection is provided by mechanical zinc plating and a duraseal II long life coating. The Kwikseal II also features a aluminum / EPDM washer.

- Type – 17 cut point for increased installation speed into 26 GA and 24 GA panels.
- Zinc plating and duraseal II coating help to prevent corrosion
- Aluminum / EPDM washer for improved corrosion resistance of washer guard.
- Largest outside diameter of all our #9 fasteners at .192-.196
- Can be painted to match your panel color
- Other applications: Aluminum shingle ridge vent attachment.

SPECIFICATIONS:

SPECIFICATIONS	TYPE
WASHER	ALUMINUM / EPDM
COATING/ RUST PROTECTION	ZINC PLATING & DURASEAL II
APPLICATION	METAL TO WOOD
POINT	TYPE 17 CUTPOINT, KWIKSEAL THREAD
HEAD/DRIVER REQUIRED	1/4" HEX WASHER HEAD

SIZES:

#9 X 1", #9 X 1 1/2", #9 X 2", #9 X 2 1/2", #9 X 3"

INSTOCK SIZES: #9 X 1 1/2" MILL FINISH

INSTALLATION:

TOOLS: 2000 – 2500 RPM SCREW DRIVER EQUIPED WITH DEPTH SENSING NOSE PIECE

SPECIFICATIONS:

PULL OUT	PULL OUT SPRUCE	PULL OUT PINE	PULL OUT FIR	PULL OVER
1 1/2" PENETRATION :	1600	2435	1640	29 GA : 573
1" PENETRATION :	1015	1670	1175	26 GA : 573

SEE CATALAOG FOR MORE DETAILS: